

Safety EN

Vacuum breaker safety valve



Mod. 795

Connection: Male thread x Free admission
MR1 x 6ØB: 3/8"x6ØB to 1"x6ØB
Material: ■ Brass, PN-16
■ Stainless steel, PN-16
Seal: ● Silicone's rubber
● Fluoroelastomer (Viton)

The valve acts as an automatic regulator of pressure drops and prevents the creation of a vacuum inside pressurised installations or vessels.

Depending on version



-50°C a +150°C




-0,05 bar a -0,40 bar



Gases

Safety ASME

Full lift safety valve with spring loading. (AIT)

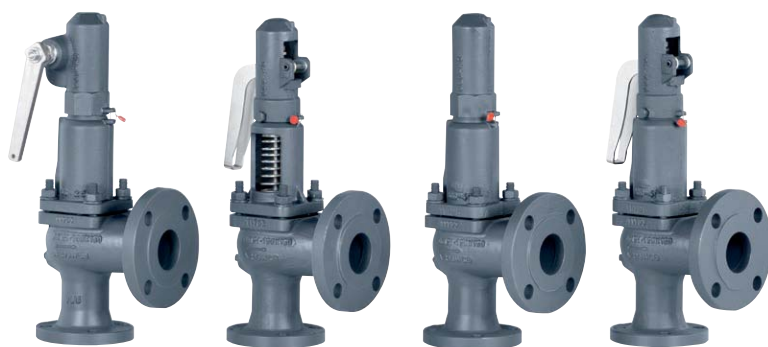

EP

AP

ES

CP

Mod. 486

Connection: Flange x Flange
NPS1 x NPS2: 1"x 2" to 8"x10"
Material: ■ Carbon steel, 150 lbs and 300 lbs
■ Stainless steel, 150 lbs and 300 lbs
Seal: ● Metal

The valve works as an automatic pressure releasing regulator activated by the static pressure existing at the entrance to the valve and is characterized by its ability to open instantly and totally.
Design in accordance with "ASME code section VIII Div.1".

Materials according ASME code section II and ASTM.
Connections according ASME/ANSI B16.5 standard.
Center to face dimensions according API-526.

Depending on version



-20,2°F to +842°F



2,90 psi to 580,15 psi



Steam/Gases/Liquids