



Float-Buoys

Float valve

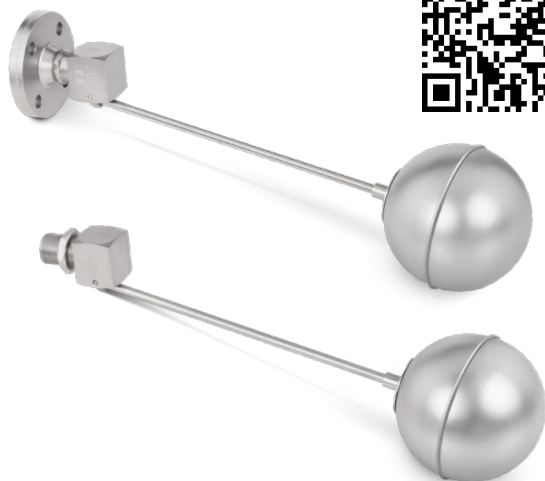

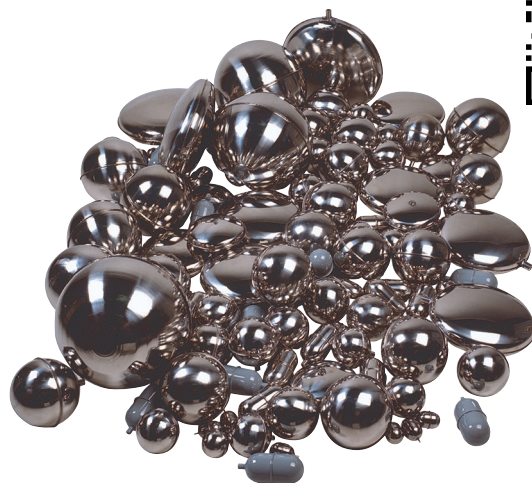

Buoys



Mod. 150 EN ASME/ANSI

Connection: Flange
 DN: 15 to 65
 Material:  Stainless steel. PN-16
 Seal:  Silicone's rubber

Mod. 151 EN ASME/MNPT

Connection: Male thread GAS
 Male thread NPT
 R: 3/8" to 2 1/2"
 Material:  Stainless steel. PN-16
 Seal:  Silicone's rubber

To control the level of liquids in tanks, deposits, etc.

Depending on version



-60°C to +200°C



16,00 bar



Liquids

Mod. 152

Material:  Stainless steel

Flat:

Ø150x60. Female thread. M10
 Ø150x60. Sliding (Ø8 mm. internal)

Ø200x80 & Ø250x95. Female thread. M10
 Ø300x115 & Ø350x130. Female thread. M12

Cylindrical:

Ø40x50. Male thread. M4
 Ø40x50. Sliding (Ø4 mm. internal)

Ø60x120. Female thread. M6. (With or without Epoxi coating)

Ø60x120. Sliding (Ø6 mm. internal). (With or without Epoxi coating)

Spherical:

Ø60. Dowel Ø4,5 mm.

Ø60. Female thread. M4

Ø90. Female thread. M10

Ø105. Sliding (Ø18 mm. internal)

Ø110 & Ø150. Female thread. M10

Ø200 & Ø300. Female thread. M12

Depending on version



-60°C to +200°C



Liquids