


Safety EN

Normal safety valve with spring loading. (AN)

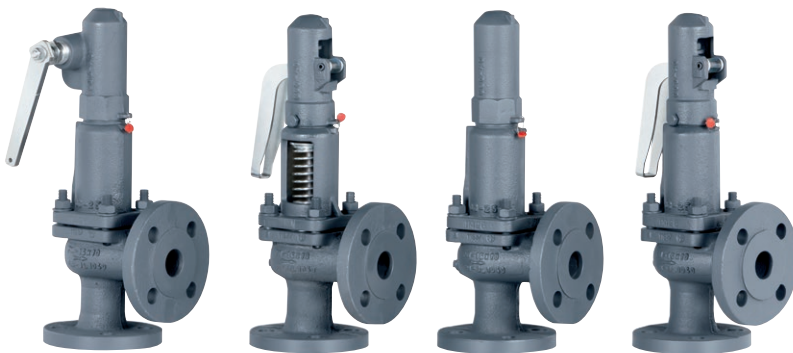

EP

AP

ES

CP

Mod. 494




EP

AP

ES







Mod. 295

Connection: Flange x Flange
 DN1 x DN2: 25x25 to 200x200
 Material:  Cast iron. PN-16
 Nodular iron. PN-40. 350°C
 Cast steel. PN-40
 Stainless steel. PN-40
 Seal:  Metal

The valve works as an automatic pressure releasing regulator activated by the static pressure existing at the entrance to the valve and is characterized by its ability to open, at the first proportional to the pressure increase, and after instantly and totally.
 Design in accordance with "International Standard ISO 4126 -1 Safety Valves".

Depending on version



Connection: Male thread x Female thread
 MR1 x FR2: 1/2"x1" to 1 1/4" x 2"
 Material:  Bronze. PMS-25 bar
 Carbon steel. PMS-25 bar
 Stainless steel. PMS-25 bar
 Seal:  PTFE (Teflon)
 Silicone's rubber
 Fluoroelastomer (Viton)

The valve works as an automatic pressure releasing regulator activated by the static pressure existing at the entrance to the valve and is characterized by its ability to open, at the first proportional to the pressure increase, and after instantly and totally.
 Design in accordance with "International Standard ISO 4126 -1 Safety Valves".

Depending on version

