


Steam traps- Separators

Ultrasonic leak detector

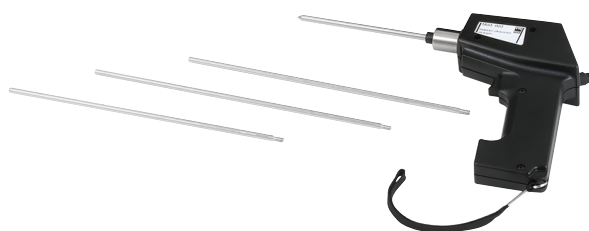

Mod. 003

Material:  Plastic ABS -Stainless steel

To detect leaks:
– In condensate purgers.
– In valve seals.

Checking for wear on bearings.
Solving mechanical problems in general.
Ultrasound is directional and localisable. In a noisy environment we can remove or block the distorting ultrasounds.
During preventive maintenance, we should place the stethoscope properly and we will detect, audibly and visually, the leaks that are affecting us. We can take corrective action, safeguarding the environment, saving energy, time and consequently money.

It meets and exceeds the requirements of ASTM E1002-2005 for Leak Detection.

Depending on version



Steam condensate separator



Mod. 944 EN ASME/ANSI

Connection: Flange x Flange

DN: 15 to 350

Material:  Carbon steel. PN-16

 Carbon steel. PN-40

Seal:  Metal

To remove condensate from steam lines. Applicable in; ironing machines, laundries and dry cleaners, cooking pots, textile machinery, drying cylinders, autoclaves, steam ovens, distilleries, heat exchangers, food industries, chemical laboratories, etc.

Depending on version

